INSTRUCTION MANUAL

ENGLISH



THANK YOU FOR CHOOSING DYNELLO!

If you have any questions,
please go to www.dynello.com

RS0402

INTENDED USE

Your Dynello-product has been designed for placement applications of cargo straps during load-securing, as well as other applications specified by Dynello.

FEATURES

This tool includes the following features:
1. Rubber ball
2. String / cord
3. Attachment hook

Safety warnings and instructions

- **Do not use product for other than its intended use.** Other uses can may result in serious personal injury.
- **Stay alert, watch what you are doing and use common sense when using the product. Do not use the product while you are tired or under the influence of drugs, alcohol or medication.** A moment of inattention while using the product may result in personal injury.

Safety of others

- This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the tool by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the tool.
- Be aware of your surroundings and never use the product if there is a risk that might result in dangerous situations.

Residual risks

- The Rubber ball(1) is made of natural rubber latex and may cause and allergic reaction to people allergic to latex.

USE

WARNING! Do not use in areas in close proximity of moving objects, such as vehicles, loading-trucks, bicycles etc. Moving objects can be caught in the string and cause personal injury and damage.

1. Preparing the tool (Fig. A & Fig. B)

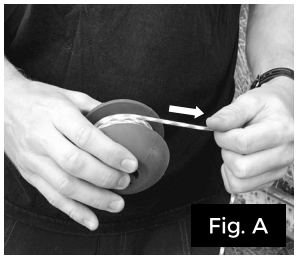
- Roll-out needed length of String(2) to reach over the truck-load. The string should be rolled-out in a collected whole.
- Attach Attachment hook(3) to the hook on the cargo strap.

2. Placement of cargo strap (Fig. C & Fig. D)

- Before tossing the Rubber ball(1) over the truck-load, make sure no people and moving objects are near. Toss Rubber ball(1) over the truck-load. *Do not stand on the String(2) when tossing the Rubber ball(1).*
- Go to the other side of the truck-load and pull the cargo strap in place. Remove the Attachment hook(3) from the cargo strap hook.

3. After use (Fig. E)

- Roll-up the String(2) on the Rubber ball(1) after use.


Fig. A


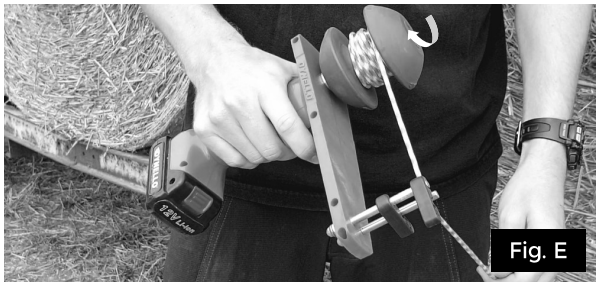

Fig. B


Fig. C


Fig. D


Fig. E